MAP 1

L 8874
Sept 3 19
Petitioners
K
Arthur E Restarick

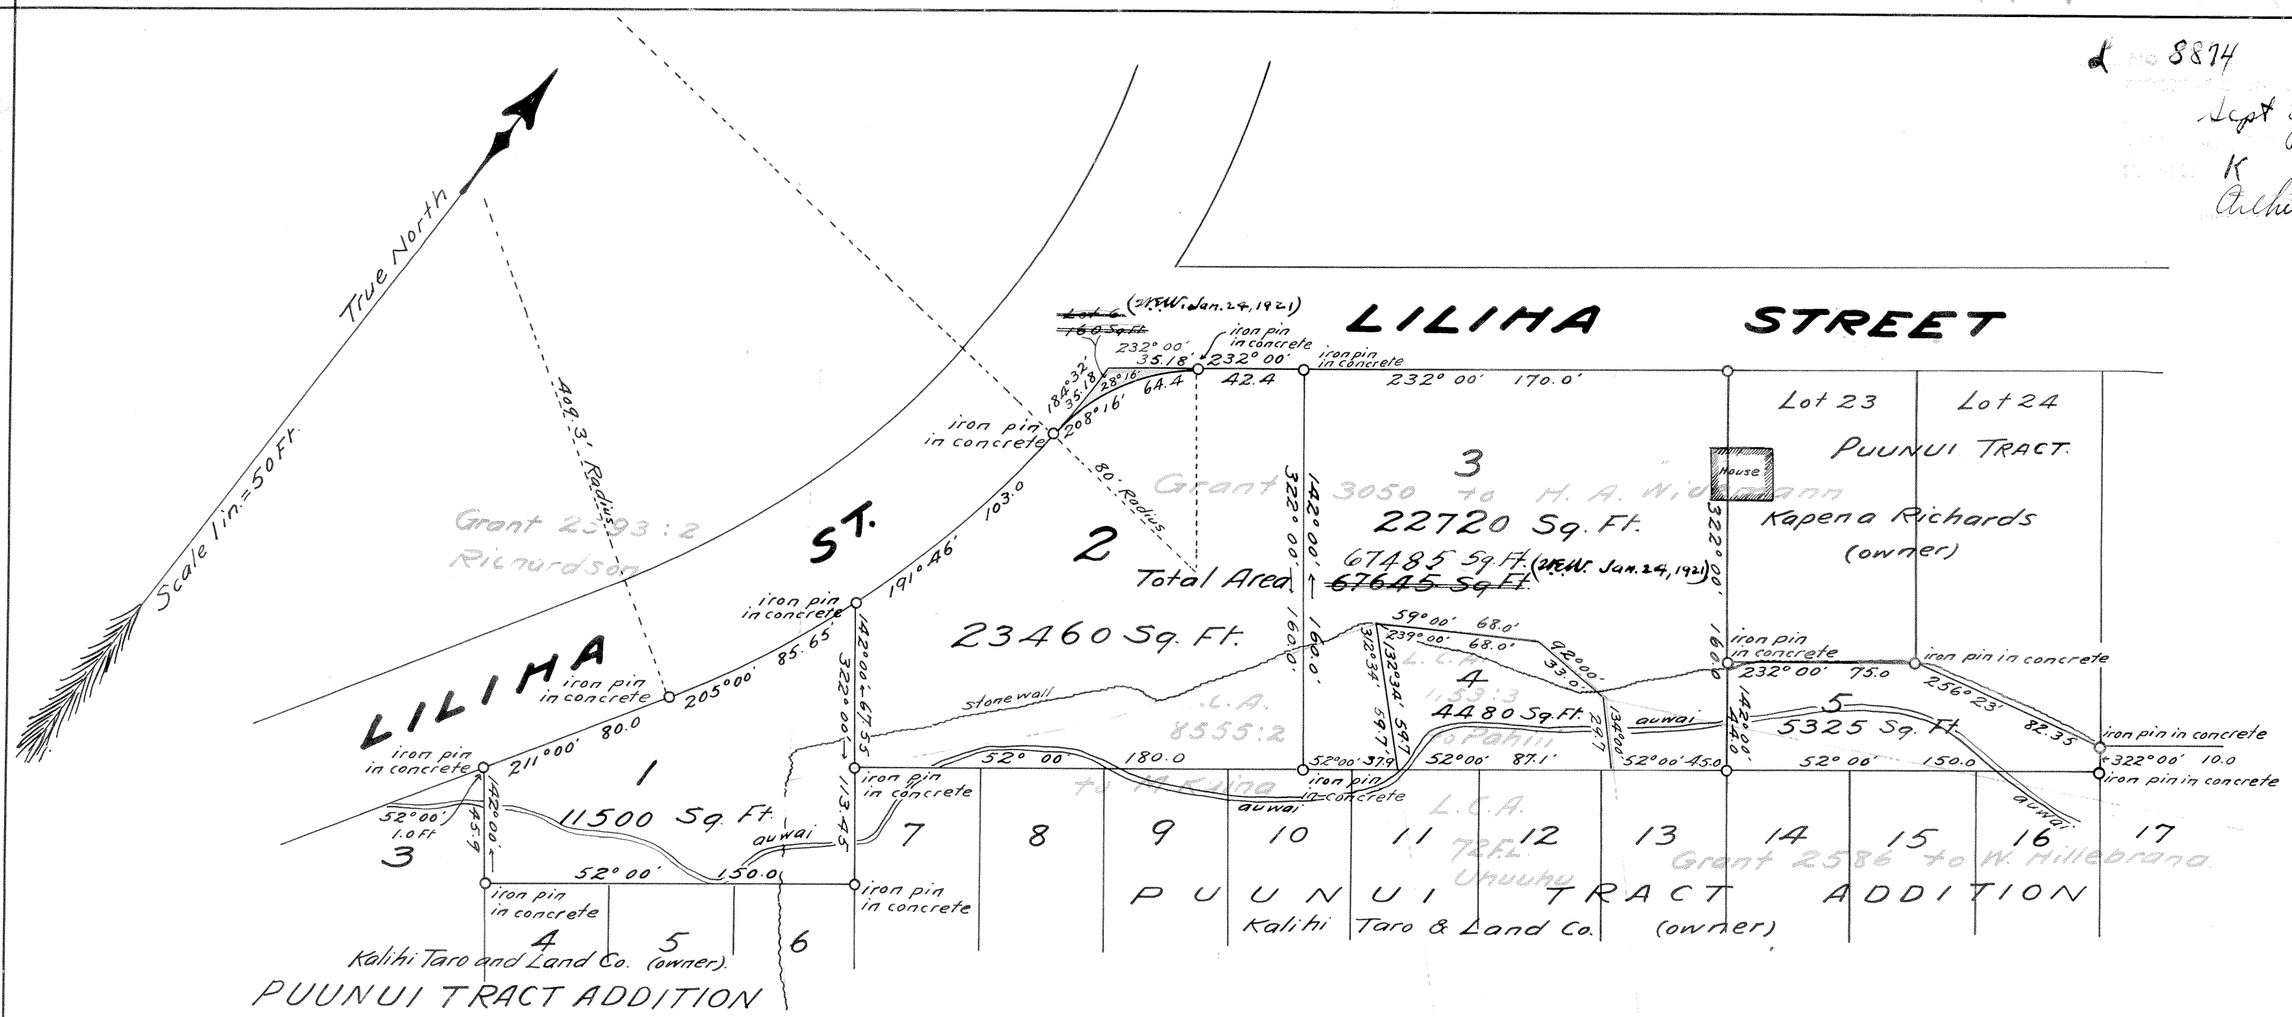

COURT OF LAND REGISTRATION
TERRITORY OF HAWAII.

Map and Description with Petition No 246 Agnes Crary Weaver - Petitioner

Being L.C.A. 1153:3 to Pahili and portions of L.C.A. 8555:2 to M. Kaina: Grant 2593:2 to Richardson: Grant 3050 to H. A. Widemann: Grant 2586 to W. Hillebrand.

Liliha Street, Puunui, Nuuanu Valley, Honolulu, Kona, Oahu, T. H.

LOT 1.- Beginning at an iron pin in concrete at the West corner of this piece, on the Southeast side of Liliha Street, the co-ordinates of said point referred to Government Survey Trig. Station "Wyllie" being 397.0 feet South and 1652.0 feet East. and running by true azimuths:-

1.- 211° 00' 80.0 Ft, along the Southeast side of Liliha Street to an iron pin in concrete. Thence on a curve to the left having a radius of 409.3 feet along the Southeast side of Liliha Street the direct azimuth and distance being.
2.- 205° 00' 85.65 Ft, to an iron pin in concrete.
3.- 322° 00' 113.45 Ft, along Lot 2 and the Puunui Tract Addition to an iron pin in concrete.
4.- 52° 00' 150.0 Ft, along Puunui Tract Addition to an iron pin in concrete.
5.- 142° 00' 45.9 Ft, along Puunui Tract Addition.
6.- 52° 00' 1.0 Ft, " " " " to the point of beginning
Area 11500 Sq. Ft.

LOT 2 Beginning at an iron pin in concrete at the South corner of this piece on the East line of Lot 1. the true azimuth and distance to an iron pin in concrete at the initial point of Lot 1 being 52° 00' 151.0 feet (the co-ordinates of said initial point of Lot 1 being 397.0 feet South and 1652.0 feet East. referred to "Wyllie" Trig. Sta.) and running by true azimuths:-

1.- 142° 00' 67.55 Ft, along Lot 1 to an iron pin in concrete. Thence on a curve to the left having a radius of 409.3 feet along the South East side of Liliha Street, the direct azimuth and distance being.
2.- 191° 46' 103.0 Ft, to an iron pin in concrete. Thence on a curve to the right having a radius of 80 feet along the South East side of Liliha Street, the direct azimuth and distance being.
3.- 208° 16' 64.4 Ft, to an iron pin in concrete.
4.- 232° 00' 42.4 Ft, along the Southeast side of Liliha St. to an iron pin in concrete.
5.- 322° 00' 160.0 Ft, along Lot 3 to an iron pin in concrete.
6.- 52° 00' 180.0 Ft, " Puunui Tract Addition to the point of beginning.
Area 23460 Sq. Ft.

LOT 3.- Beginning at an iron pin in concrete at the South corner of this piece, and the East corner of Lot 2, the true azimuth and distance to an iron pin in concrete at the initial point of Lot 1 being 52° 00' 331.0 feet (the co-ordinates of said initial point of Lot 1 being 397.0 feet South, and 1652.0 feet East. referred to "Wyllie" Trig. Sta.) and running by true azimuths:-

1.- 142° 00' 160.0 Ft, along Lot 2 to an iron pin in concrete.
2.- 232° 00' 170.0 Ft, " the Southeast side of Liliha Street.
3.- 322° 00' 160.0 Ft, along Richard's Lot and Lot 5
4.- 52° 00' 45.0 Ft, along Puunui Tract Addition.
5.- 134° 00' 29.7 Ft, " Lot 4.
6.- 92° 00' 33.0 Ft, " " " .
7.- 59° 00' 68.0 Ft, " " " .
8.- 312° 34' 59.7 Ft, " " " .
9.- 52° 00' 37.9 Ft, " Puunui Tract Addition to the point of beginning
Area 22720 Sq. Ft.

LOT 4.- Beginning at the South corner of this piece, the true azimuth and distance, to an iron pin in concrete at the South corner of Lot 3 being 52° 00' 37.9 feet, and running by true azimuths:-

1.- 132° 34' 59.7 Ft, along Lot 3.
2.- 239° 00' 68.0 Ft, " " " .
3.- 272° 00' 33.0 Ft, " " " .
4.- 314° 00' 29.7 Ft, " " " .
5.- 52° 00' 87.1 Ft, " Puunui Tract Addition to the point of beginning.
Area 4480 Sq. Ft.

Lot 5.- Beginning at the South corner of this piece and the East corner of Lot 3. the true azimuth and distance to an iron pin in concrete at the initial point of Lot 1. being 52° 00' 501.0 feet (the co-ordinates of said initial point of Lot 1 being 397.0 feet South and 1652.0 feet East referred to "Wyllie" Trig Sta.) and running by true azimuths:-

1.- 142° 00' 44.0 Ft, along Lot 3 to an iron pin in concrete.
2.- 232° 00' 75.0 Ft, " Richards to an iron pin in concrete.
3.- 256° 23' 82.35 Ft, " " " " " " " " .
4.- 322° 00' 10.0 Ft, " Puunui Tract Addition to an iron pin in concrete.
5.- 52° 00' 150.0 Ft, along Puunui Tract Addition to the point of beginning
Area. 5325 Sq. Ft.

LOT 6.- Beginning at an iron pin in concrete, at the South corner of this piece, on the Southeast side of Liliha Street. and on the East line of Lot 2 and running by true azimuths:-

1.- 184° 32' 35.18 Ft, along the old Southeast side of Liliha Street.
2.- 232° 00' 35.18 Ft, along the Southeast side of Liliha Street. Thence on a curve to the left having a radius of 80 feet along the new Southeast side of Liliha Street, the true azimuth and distance being,
3.- 28° 16' 64.4, Ft, to the point of beginning.
Area 160 Sq. Ft.

Map amended by striking out description of Lot 6 by Order of Judge of Land Court dated Jan. 21, 1921. Honolulu T.H. January 24, 1921 Walter E. Wall Surveyor Terr. of Hawaii.

Honolulu. T.H.
Nov. 6. 1912.

Geo. F. Wright
Surveyor & maker of plan
855 Kaahumanu St.

Agnes Crary Weaver
Petitioner

No. 246

Filed Nov. 18th. 1912.
At 9 o'clock A.M.
John Marcallino
Registrar.

I hereby certify that this is a true and correct copy of Land Court Petition No. 246
Geo. F. Wright
Honolulu
June 9-1913

L 8874
Sept. 5 19
Petitioners
"K"
Arthur E Restarick

246